


W.I.C.C. Ltd
119 MULLER RD
PO Box 252
WASHINGTON IL 61571
(309)-444-4125
FAX (309)-444-3313

CURRENT TRANSFORMER MODEL 2560

1.56" I.D.

PAGE No 1-68

REV 18DEC00

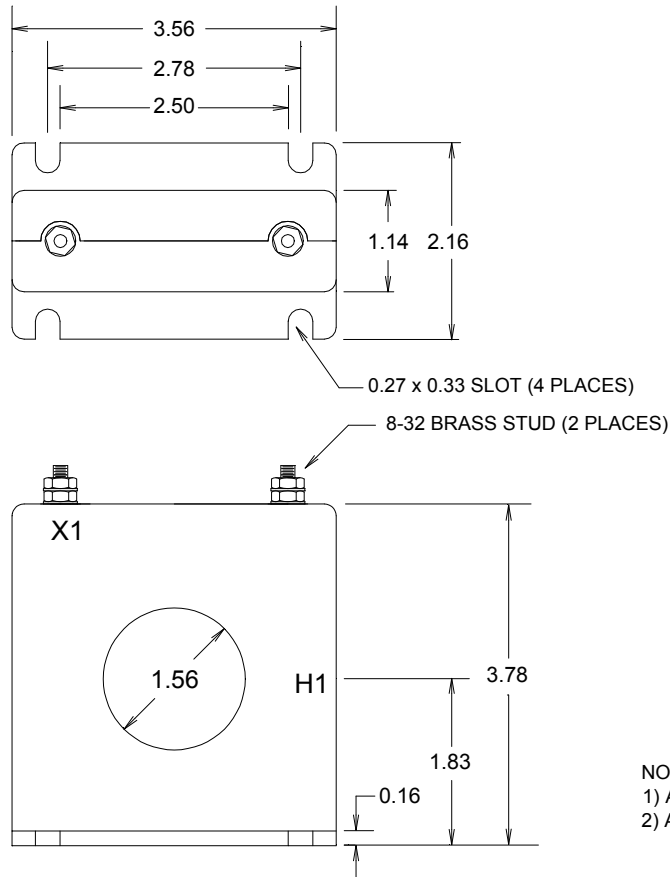

NOTE:
1) ALL DIMENSIONS IN INCHES
2) ALL DIMENSIONS REF ONLY

Specifications

- ☐ Secondary sources 5 amps AC at rated F.S. primary current
- ☐ Nominal operating frequency range is 50-400HZ
- ☐ Thermal rating factor is 1.33 @ 30C for ratios thru 1000:5A, 1.15 @ 30C for ratios above 1000:5A
- ☐ Insulation voltage class is 0.6KV BIL 10KV
- ☐ For indoor applications only
- ☐ Reference documents IEEE C57.13, UL1244, CSA CAN3-C13-M83, and IEC 44-1
- ☐ Enclosure is glass-filled nylon, color is black

Options, contact Factory for information

- ☐ UL and Canadian UL Recognized Component. File E100575
- ☐ 2.0, 5.0, and 10 VAC output at F.S. primary amperage. Other non-standard ratings also available.
- ☐ 1.0, 0.2, and 0.1 A output at F.S. primary amperage. Other non-standard ratings also available
- ☐ Thermal ratings above 1.33 for selected ratios.

1.56" I.D.

PAGE No 1-69


REV 18DEC00

CURRENT TRANSFORMER MODEL 2560



W.I.C.C. Ltd
119 MULLER RD
PO Box 252
WASHINGTON IL 61571
(309)-444-4125
FAX (309)-444-3313

TYPICAL EXCITATION CURVE for WICC MODEL 2560 at 60HZ

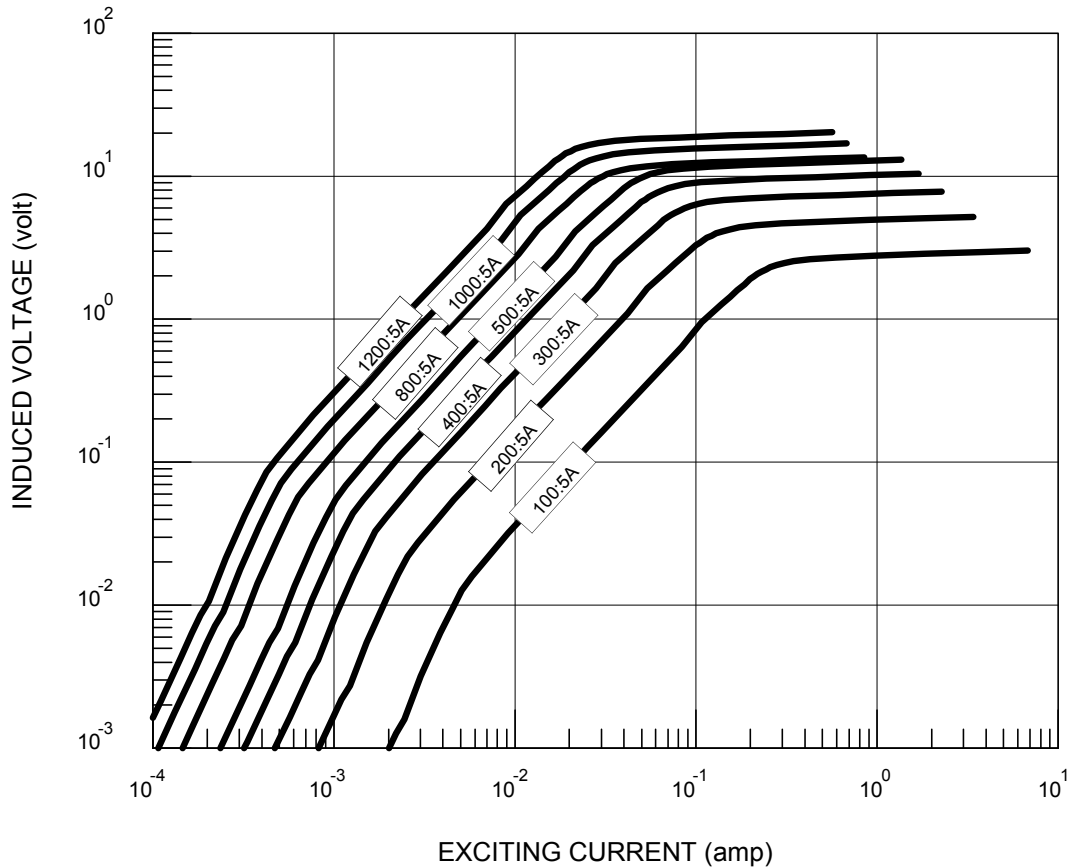

W.I.C.C. PART NUMBER *	RATIO	ACCURACY @ 60HZ, pf = 0.95		NOMINAL WINDING RESISTANCE (ohm)
		± %	BURDEN (VA)	
2560-050-00-xxx	50:5A	3.0	2.0	0.01
2560-100-00-xxx	100:5A	1.0	2.0	0.02
2560-200-00-xxx	200:5A	1.0	7.5	0.06
2560-250-00-xxx	250:5A	1.0	12	0.07
2560-300-00-xxx	300:5A	1.0	20	0.09
2560-400-00-xxx	400:5A	1.0	30	0.11
2560-500-00-xxx	500:5A	1.0	45	0.14
2560-600-00-xxx	600:5A	1.0	35	0.14
2560-800-00-xxx	800:5A	1.0	50	0.19
2560-1000-00-xxx	1000:5A	1.0	60	0.24
2560-1200-00-xxx	1200:5A	1.0	75	0.37

* "xxx" describes termination: "T" FOR BRASS STUDS, "Lyyy" FOR LEAD WIRES (Where "yyy" is the lead length in inches. For example, "L24" represents 24 inch long lead wires.)