

W.I.C.C. Ltd
119 MULLER RD
PO Box 252
WASHINGTON IL 61571
(309)-444-4125
FAX (309)-444-3313


CURRENT TRANSFORMER MODEL 653

2.50" I.D.


PAGE No 1-56

REV 18DEC00

TERMINAL OPTION

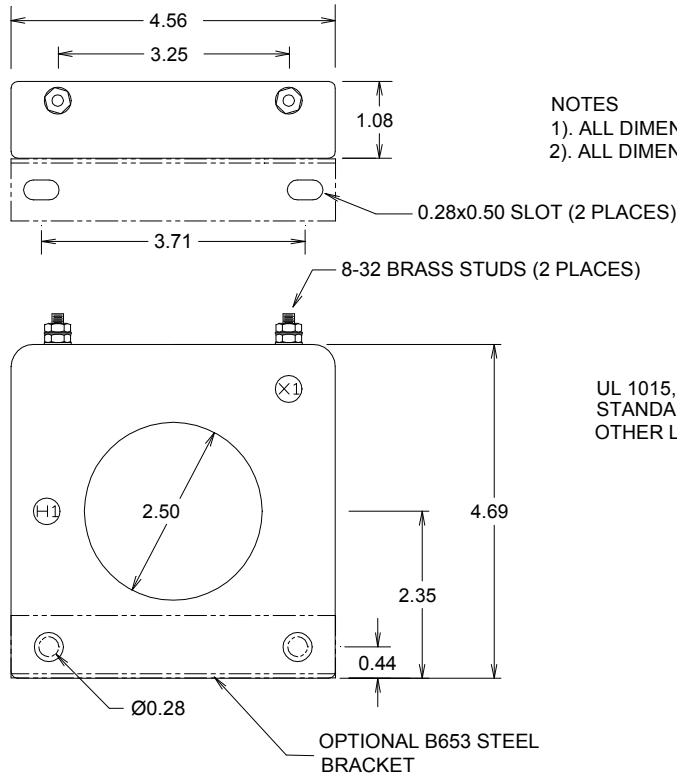

LEAD WIRE OPTION

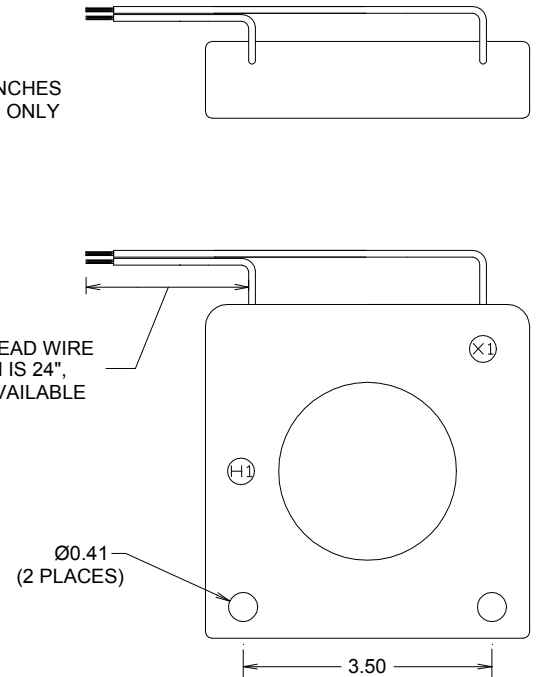

Specifications

- Secondary sources 5 amps AC at rated F.S. primary current
- Nominal operating frequency range is 50-400HZ
- Thermal rating factor is 1.33 @ 30C for ratios up to 1250:5A, 1.15 @ 30C for ratios above 1250:5A
- Insulation voltage class is 0.6KV BIL 10KV
- For indoor applications only
- Reference documents IEEE C57.13, UL1244, CSA CAN3-C13-M83, and IEC 44-1
- Enclosure is made of glass-filled Nylon, color is black

Options, contact Factory for information


- UL and Canadian UL Recognized Component. File E100575.
- 2.0, 5.0, and 10 VAC output at F.S. primary amperage. Other non-standard ratings also available.
- 1, 0.2, and 0.1 A output at F.S. primary amperage. Other non-standard ratings also available.
- 8-32 Brass Studs or #16 AWG UL 1015 Lead Wires.
- Custom lead wire lengths and types.
- Thermal ratings above 1.33 for selected ratios
- Housing with or without mounting flange (See Model 653F for flange design).
- Center tap and custom multi tap winding arrangements

2.50" I.D.

PAGE No 1-57


REV 18DEC00

CURRENT TRANSFORMER MODEL 653



W.I.C.C. Ltd
119 MULLER RD
PO Box 252
WASHINGTON IL 61571
(309)-444-4125
FAX (309)-444-3313

TYPICAL EXCITATION CURVE for WICC MODEL 653 and 653F at 60HZ

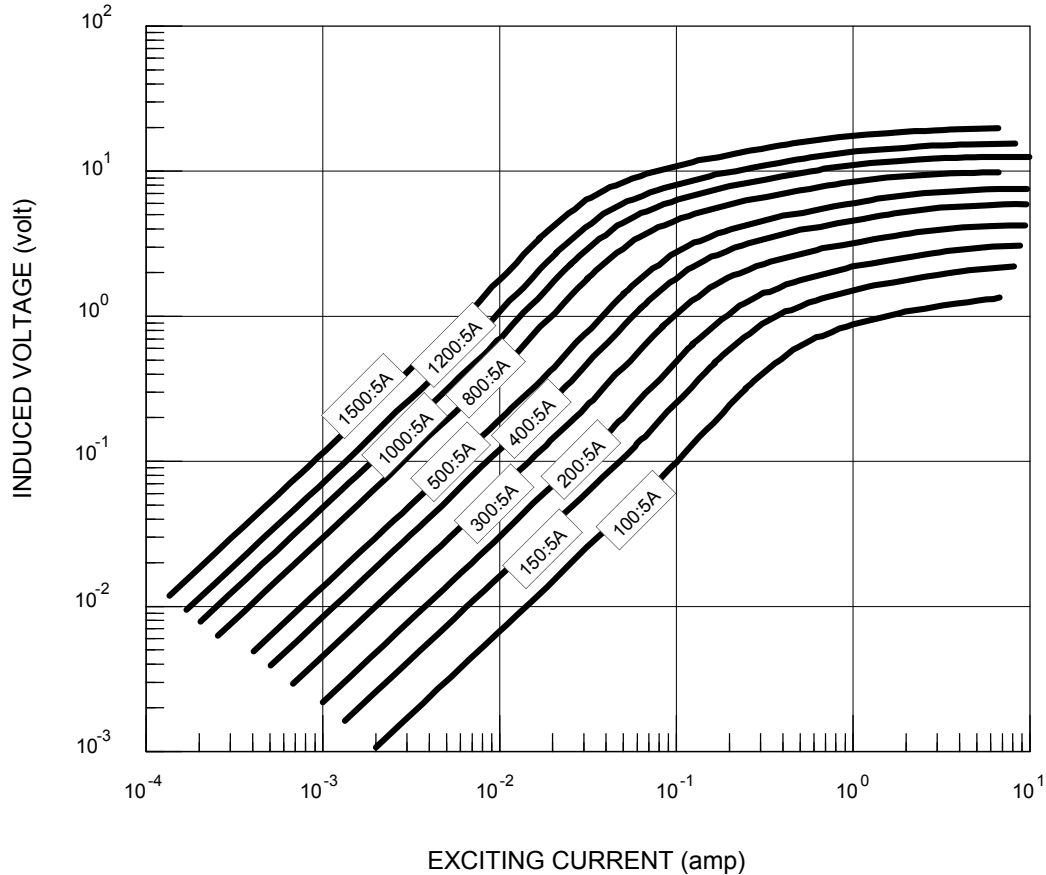

W.I.C.C. PART NUMBER *	RATIO	ACCURACY @ 60HZ		NOMINAL WINDING RESISTANCE (ohm)
		± %	BURDEN (VA)	
653-100-00-xxx	100:5A	3.0	2.0	0.02
653-150-00-xxx	150:5A	1.5	2.0	0.03
653-200-00-xxx	200:5A	1.0	2.0	0.04
653-250-00-xxx	250:5A	1.0	2.0	0.04
653-300-00-xxx	300:5A	1.0	2.0	0.05
653-400-00-xxx	400:5A	1.0	4.0	0.10
653-500-00-xxx	500:5A	1.0	6.5	0.12
653-600-00-xxx	600:5A	1.0	10	0.14
653-800-00-xxx	800:5A	1.0	15	0.19
653-1000-00-xxx	1000:5A	1.0	15	0.22
653-1200-00-xxx	1200:5A	1.0	20	0.27
653-1500-00-xxx	1500:5A	1.0	20	0.42
653-1600-00-xxx	1600:5A	1.0	25	0.45

* "xxx" describes termination: "T" FOR BRASS STUDS, "Lyyy" FOR LEAD WIRES (Where "yyy" is the lead length in inches. For example, "L24" represents 24 inch long lead wires.)