


W.I.C.C. Ltd
119 MULLER RD
PO Box 252
WASHINGTON IL 61571
(309)-444-4125
FAX (309)-444-3313

CURRENT TRANSFORMER MODEL J10/24

10" x 24"

PAGE No 2-16

REV 18DEC00

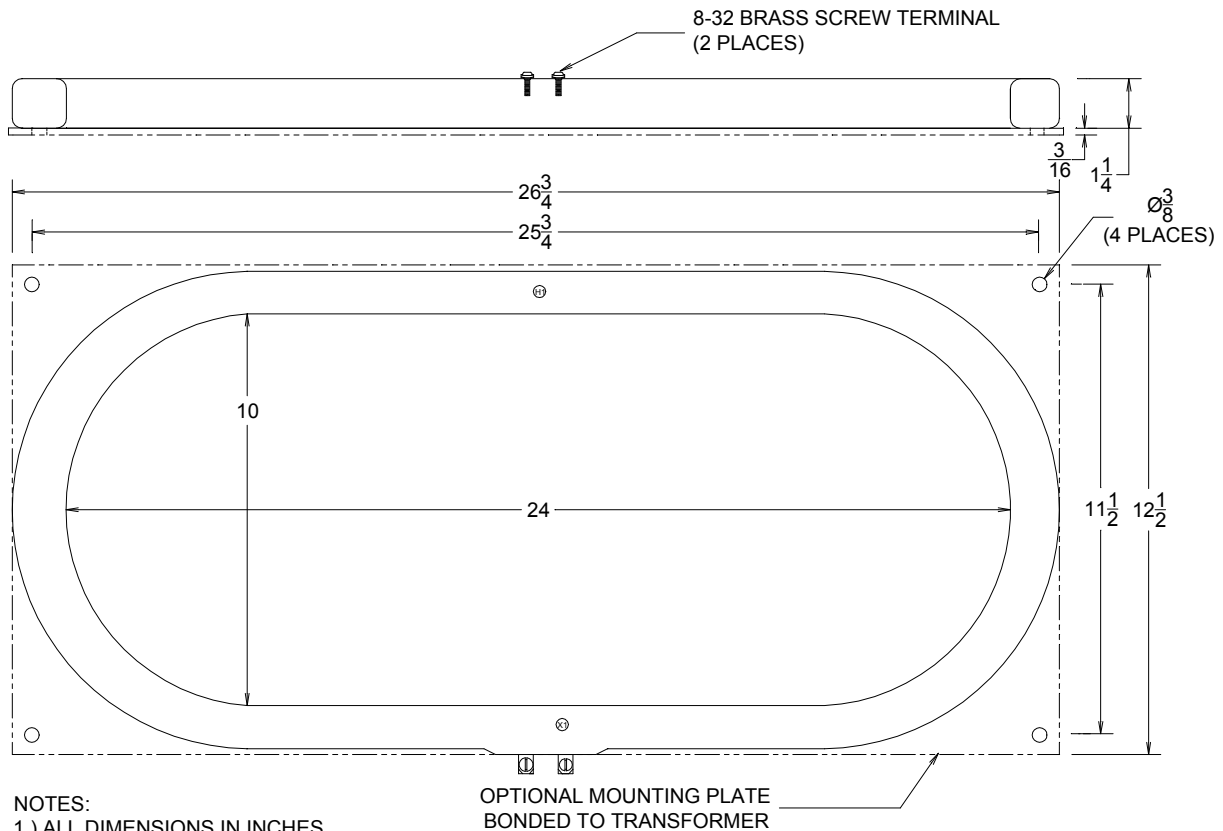

Specifications

- ☐ Secondary sources 5 amps AC at rated F.S. primary current
- ☐ Nominal operating frequency range is 50-400HZ
- ☐ Thermal rating factor is 1.33 @ 30C for all ratios
- ☐ Insulation voltage class is 0.6KV BIL 10KV
- ☐ For indoor applications only
- ☐ Reference documents IEEE C57.13, UL1244, CSA CAN3-C13-M83, and IEC 44-1
- ☐ Enclosure is multi-layer tape buildup with heavy vinyl finish, color is black
- ☐ Optional plate is XX phenolic

Options, contact Factory for information


- ☐ 2.0, 5.0, and 10 VAC output at F.S. primary amperage. Other non-standard ratings also available.
- ☐ 1, 0.2, and 0.1 A output at F.S. primary amperage. Other non-standard ratings also available
- ☐ 8-32 Screw Terminals or #16 AWG UL 1015 Lead Wires
- ☐ Custom lead wire lengths and types
- ☐ Thermal ratings above 1.33 for selected ratios.

10" x 24"

PAGE No 2-17


REV 18DEC00

CURRENT TRANSFORMER MODEL J10/24



W.I.C.C. Ltd
119 MULLER RD
PO Box 252
WASHINGTON IL 61571
(309)-444-4125
FAX (309)-444-3313

TYPICAL EXCITATION CURVE FOR WICC MODEL J10/24 at 60HZ

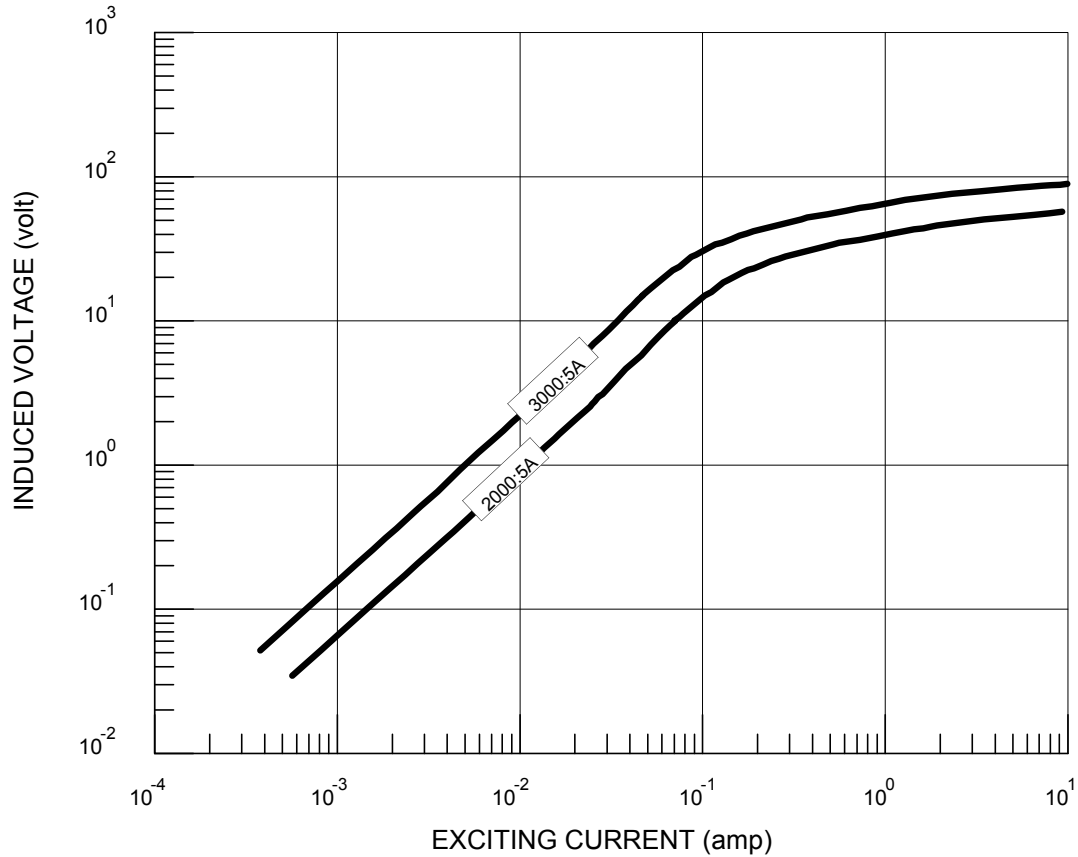

W.I.C.C. PART NUMBER *	RATIO	ACCURACY @ 60HZ		NOMINAL WINDING RESISTANCE (ohm)
		± %	BURDEN (VA)	
J10/24-2000-00-xxx	2000:5A	1.0	30	0.60
J10/24-3000-00-xxx	3000:5A	1.0	85	0.91

* "xxx" describes termination: "T" FOR BRASS SCREW TERMINALS and "Lyyy" FOR LEAD WIRES (Where "yyy" is the lead length in inches. For example, "L24" represents 24 inch long lead wires.)