

7" x 27"


REV 18DEC00



☐ Secondary sources 5 amps AC at rated F.S. primary current	☐ Reference documents IEEE C57.13, UL1244, CSA CAN3-C13-M83, and IEC 44-1
☐ Nominal operating frequency range is 50-400HZ	☐ Enclosure is multi-layer tape buildup with heavy vinyl finish, color is black
☐ Thermal rating factor is 1.33 @ 30C for all ratios	☐ Optional plate is XX phenolic
☐ Insulation voltage class is 0.6KV BIL 10KV	
☐ For indoor applications only	

- ☐ 2.0, 5.0, and 10 VAC output at F.S. primary amperage. Other non-standard ratings also available.
- ☐ 1, 0.2, and 0.1 A output at F.S. primary amperage. Other non-standard ratings also available
- ☐ 8-32 Screw Terminals or #16 AWG UL 1015 Lead Wires
- ☐ Custom lead wire lengths and types
- ☐ Thermal ratings above 1.33 for selected ratios.

TYPICAL EXCITATION CURVE FOR WICC MODEL J7/27 at 60HZ

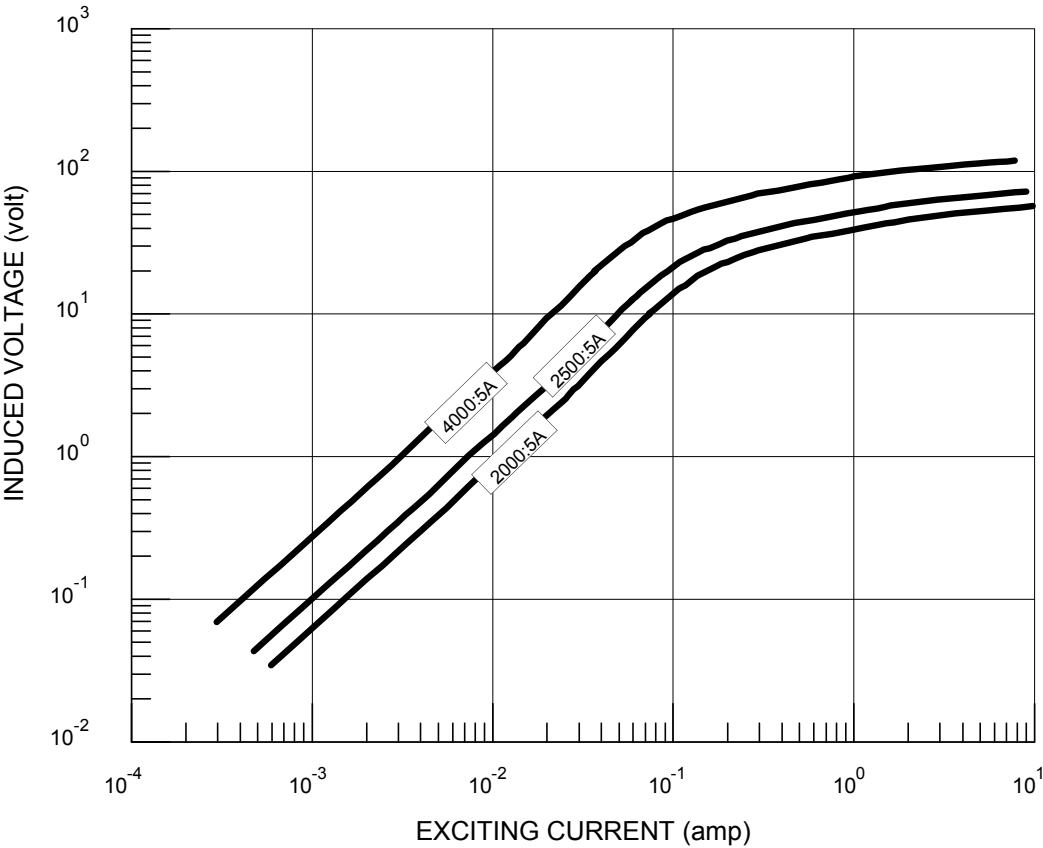

W.I.C.C. PART NUMBER *	RATIO	ACCURACY @ 60HZ		NOMINAL WINDING RESISTANCE (ohm)
		± %	BURDEN (VA)	
J7/27-2000-00-xxx	2000:5A	1.0	30	0.60
J7/27-2500-00-xxx	2500:5A	1.0	55	0.75
J7/27-4000-00-xxx	4000:5A	1.0	100	1.21

* "xxx" describes termination: "T" FOR BRASS SCREW TERMINALS and "Lyyy" FOR LEAD WIRES (Where "yyy" is the lead length in inches. For example, "L24" represents 24 inch long lead wires.)